



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

**Patentanmeldung Nr. Patent application No. Demande de brevet n°**

04251182.4

**BEST AVAILABLE COPY**

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**



P.B.5818 - Patentaan 2  
2280 HV Rijswijk (ZH)  
☎ +31 70 340 2040  
TX 31651 epo nl  
FAX +31 70 340 3016

Europäisches  
Patentamt

Eingangs-  
stelle

European  
Patent Office

Receiving  
Section

Office européen  
des brevets

Section de  
Dépôt

KEF/177

Mackett, Margaret Dawn  
BAE Systems plc  
Intellectual Property Department  
Lancaster House  
P.O. Box 87  
Farnborough Aerospace Centre  
Farnborough, Hampshire GU14 6YU  
GRANDE BRETAGNE

Datum/Date 14-04-2005

Zeichen/Ref./Réf.

xa1761

Anmeldung Nr./Application No./Demande n°/Patent Nr./Patent No./Brevet n°.

04251182.4-1249/

Anmelder/Applicant/Demandeur/Patentinhaber/Propriétaire/Titulaire

BAE Systems PLC

### COMMUNICATION

☒ concerning the registration of a transfer (Rule 20 EPC)

☐ concerning the change of name of the applicant (Rule 92(1)(f) EPC)

As requested, the records concerning the applicant of the above-mentioned European patent application have been amended to the following:

AT-BE-BG-CH-CY-CZ-DE-DK-EE-ES-FI-FR-GB-GR-HU-IE-IT-LU-MC-NL-  
PL-PT-RO-SE-SI-SK-TR-LI  
BAE Systems PLC  
6 Carlton Gardens  
London SW1Y 5AD/GB

180205

The transfer (change of name) takes effect from .....

In the case of a published application, the change will be recorded in the Register of European Patents and published in the European Patent Bulletin (Section I.12).

Your attention is drawn to the fact that, in the case of the registering of a transfer according to Rule 20 EPC, any automatic debit order by the former applicant does not cease to be effective before the date of its express revocation (point 14(c) of the Arrangements for the automatic debiting procedure (Supplement to Official Journal no. 2/1999)).

RECEIVING SECTION





Anmeldung Nr:  
Application no.: 04251182.4  
Demande no:

Anmeldetag:  
Date of filing: 01.03.04  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

BAE SYSTEMS (Defence Systems) Limited  
Warwick House,  
P.O. Box 87,  
Farnborough Aerospace Centre  
Farnborough,  
Hampshire, GU14 6YU  
GRANDE BRETAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Improvements in or relating to call control


In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H04L12/56

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PL PT RO SE SI SK TR LI



- 1 -

## IMPROVEMENTS IN OR RELATING TO CALL CONTROL

The present invention relates to improvements in or relating to call control and is more particularly, although not exclusively, concerned with call admission.

5 In traditional telephony, that is, circuit switched telephony, for a call to be established between two remote telephones, that is, telephones connected to different local exchanges, signalling is used to establish a path prior to establishing the call itself. The path in the above example comprises initiating telephone to its local exchange, initiating local exchange to trunk connection,  
10 trunk connection to receiving local exchange, and receiving local exchange to receiving telephone. Here, the signalling and the call usually take the same path and there is full control of the path through each element in the path. As there is full control, it is relatively straightforward to determine whether a call between two telephones can be established or not.

15 In conventional internet protocol (P) telephony, the local exchanges are replaced by local 'gatekeepers' which communicate with one or more trunk gatekeepers to establish the path between the initiating telephone and the receiving telephone. Here, signalling is effected through the trunk gatekeeper(s) but the call does not take the same path. In this case, the trunk  
20 gatekeeper(s) control the bandwidth which can be used in establishing the call, and if the bandwidth is not sufficient, the call is not established.

With the advent of opaque trunk IP telephony, there is no gatekeeper in the IP network which forms the "trunk". As a result, there is effectively no control over being able to establish a call successfully. Here, the initiating  
25 telephone cannot be certain that a call, once established, will be successfully completed.

It is therefore an object of the present invention to provide a method of call admission control that overcomes the disadvantages described above.

In accordance with one aspect of the present invention, there is provided  
30 a method of call admission control for a continuous stream of data in packet

- 2 -

switched networks including at least two local area networks communicating to one another across a connecting network, the method comprising the steps of:

a) transmitting a burst of trial data from a first node in a first local area network through the connecting network to a second node in a second  
5 local area network;

b) reflecting the burst of trial data received at the second node back to the first node;

c) receiving the reflected burst of trial data at the second node through the connecting network; and

10 d) comparing the reflected burst of trial data to the transmitted burst of trial data to determine whether transmission of a continuous stream of data can be initiated from the first node in the first local area network to the receiving node in the second local area network.

Advantageously, step a) includes selecting a path through the connecting  
15 network, the path being determined by the connecting network.

Preferably, the burst of trial data is the same size as the packets to be transmitted in the continuous stream of data.

The burst of trial data may be transmitted at the same data rate as the packets to be transmitted. Alternatively, the burst of trial data may be  
20 transmitted at a higher data rate than the packets to be transmitted.

In one embodiment of the present invention, step d) includes comparing the number of packets in the transmitted burst of trial data and the reflected burst of trial data, and calculating an estimate of packet loss rate of the path.

In this embodiment, multiple bursts of trial data may be transmitted to  
25 improve the estimate.

The method further comprises the step of:-

e) deciding to transmit packet data based on an acceptable packet loss rate for the transmission of the continuous stream of data.

- 3 -

If the packet loss rate is not acceptable, step e) may include changing the priority of the transmission of continuous stream of data and repeating steps a) to d) above at the changed priority. Alternatively, step e) may include not initiating the transmission of the continuous stream of data.

5        Step e) may be carried out by the first node, by another node in the first network or by a human operator.

For a better understanding of the present invention, reference will now be made, by way of example only, to the accompanying drawings in which:-

Figure 1 illustrates a conventional circuit switched telephony network;

10        Figure 2 illustrates a conventional IP telephony network; and

Figure 3 illustrates an opaque trunk IP telephony in accordance with the present invention.

Referring initially to Figure 1, a plurality of telephones 100, 200, 300 connected to respective local telephone exchanges 120, 220, 320 by respective  
15        lines 140, 240, 340. If a call is to be made between telephone 100 and telephone 200, the call must be routed via exchange 120, trunk connection 400 and exchange 220. Here, the trunk connection 400 includes a trunk exchange 420 which determines whether the call can be established.

Similarly, if a call is to be made between telephone 100 and telephone  
20        300, it is routed from telephone 100 via exchange 120, a trunk connection (not shown) between exchange 120 and exchange 320, and exchange 320 to telephone 300.

Naturally, each exchange 120, 220, 320 has more than one telephone 100, 200, 300 connected to it and other trunk connections are provided between  
25        pairs of exchanges 120, 220, 320.

Referring now to Figure 2, two networks 10, 20 are shown which are connected to one another via a connecting network 30. Network 10 includes a plurality of telephones 12, 14, 16 and a gatekeeper 18 and network 20 includes a plurality of telephones 22, 24, 26 and a gatekeeper 28. Gatekeepers 18, 28

- 4 -

are known as 'local' gatekeepers and each gatekeeper 18, 28 controls calls made into and out of its associated network 10, 20.

Although three telephones are shown in each network, it will be appreciated that the number of telephones in each network may be any suitable  
5 number in accordance with the application of the network. It will also be appreciated that one network may have a different number of telephones to the other network.

As shown, connecting network 30 also includes a gatekeeper 32 for controlling the calls routed through the network 30. Gatekeeper 32 is known as  
10 a 'trunk' gatekeeper.

It will be understood that if telephone 12 in network 10 wants to make a call to telephone 22 in network 20, as indicated by the dotted arrow 40, the call is routed from telephone 12 to gatekeeper 18 for onward routing through the connecting network 30. In the connecting network 30, the call is routed through  
15 gatekeeper 32 and then to gatekeeper 28 in network 20 prior to being routed to telephone 22. At each gatekeeper 18, 32, 28, there is a possibility of the call being dropped if the bandwidth of the respective gatekeeper is not sufficient at the time the call is to be made.

In Figure 3, two networks 50, 60 are shown which are connected to one  
20 another via a connecting network 70. However, it will be appreciated that more than two networks may be connected to the connecting network 70, and only two networks 50, 60 are shown for clarity and ease of description.

Each network 50, 60 includes a plurality of telephones (although only two telephones 52, 54 and 62, 64 are shown for clarity). Each network 50, 60 also  
25 includes a respective gatekeeper 56, 66. It will be appreciated that networks 50, 60 are similar to networks 10, 20 of Figure 2.

The connecting network 70 includes a plurality of routing nodes 72, 74, 76, 78, 80 for routing calls within the network 70 from one network 50, 60 to another. Each pair of nodes 72, 74, 76, 78, 80 is connected together by a link  
30 or connection. It is to be noted that not every node need be connected to each other node.

- 5 -

In the embodiment illustrated in Figure 3, node 72 is effectively connected to network 50 and node 80 is effectively connected to network 60. Node 72 is also connected to nodes 74, 76 and 78 and node 80 is also connected to nodes 74, 76 and 78. There is no direct connection between  
5 nodes 72 and 80 in the connecting network 70.

If a call is to be placed from telephone 54 in network 50 to telephone 62 in network 60, it is routed via gatekeeper 56 to node 72 in connecting network 70. As there is no direct connection between node 72 and node 80, the call may be routed to node 80 in one of several ways. For example, the routes may  
10 via the following nodes:-

- via node 74 - links 82 & 84
- via node 76 - links 86 & 88
- via node 78 - links 90 & 92
- via nodes 74 and 76 - links 82, 94 & 88 (or links 86, 94 & 84 in the  
15 other direction)
- via nodes 74 and 78 - links 82, 96 & 92
- via nodes 76 and 78 - links 86, 98 & 92 (or links 90, 98 & 88 in the other direction)
- via nodes 74, 76 and 78 - links 82, 94, 98 & 92 (or other combinations  
20 of the same links dependent the direction)

It will be appreciated that, for each node through which a call is to be routed, there is a possibility of packets from the continuous stream of data comprising a call being lost depending on the available bandwidth in the link between each pair of nodes.

25 In Figure 3, the networks 50, 60 comprise 'local' networks which are controlled by the respective gatekeeper 56, 66. In this case, the connecting network 70 does not include a gatekeeper in the same way as Figure 2. In effect, availability of bandwidth in the connecting network 70 is opaque to both

- 6 -

local networks 50, 60 and can be considered to be an opaque 'trunk' connection.

Whilst the present invention has been described with reference to calls being made from one telephone to another, it will be appreciated that the present invention is equally applicable to other types of traffic. Such traffic, for example, transmissions and communications, include management and signalling transmissions (rate limited), video transmissions and data transmissions. Traffic can be transmitted in the form of Internet Protocol (IP) packets. The traffic may comprise continuous streams of data and may be rate limited. Each packet may be encrypted for secure transmission in accordance with a suitable packet cryptograph. Encryption is carried out in the local network by the transmitting node or another node and/or another element (not shown) located within that network.

It will readily be appreciated that it is possible to prioritise traffic within an IP network so that certain types of traffic have particular priorities. It will also be appreciated that the priority of the traffic can be altered as required.

The issue of congestion only arises when there is insufficient bandwidth for a particular kind of traffic, either because link capacity is occupied by traffic of a higher priority, or because a link physically does not have the required bandwidth. Independent transmitters or nodes must detect congestion and individually react to it so as to reduce the load presented to the network and avoid 'congestion collapse'.

Congestion can arise in two ways:-

1. A particular transmitter or node can start up, adding extra load to an adequately functioning network.
2. The bandwidth available in the network can change, either because of higher priority traffic being given preference or because of a routing change in the network, so that traffic is now carried over a lower capacity link.

- 7 -

In either case, the transmitter or node must implement a congestion avoidance scheme so as to allow as much traffic as possible at that priority level to successfully transit the network.

The vast majority of the data traffic will be transmitted using  
5 Transmission Control Protocol (TCP) which has extremely robust congestion  
behaviour. TCP allows for the reliable transfer of data if there are no time  
constraints as it allocates the available bandwidth as fairly as possible. TCP  
uses 'slow start' (TCP-slow start) to avoid putting a sudden extra load on the  
network when a transmitter or node first starts up and does not yet know what is  
10 an appropriate transmission rate. Data acknowledgements are used as the  
feedback mechanism by which the transmitter or node maintains the  
appropriate rate of transmission in the steady state. A transmitter or node  
gradually attempts to transmit faster and faster, but when congestion is  
detected it backs off rapidly (known as TCP-backoff). The result is that TCP  
15 transmitters or nodes can maintain a total load on a network that is very close to  
capacity, but when the available network bandwidth suddenly changes they  
adapt to it very rapidly.

Congestion management mechanisms of similar robustness must  
therefore be used for voice transmissions too, so as to avoid congestion  
20 collapse within a particular priority level used for transmission of continuous  
streams of data. To this end, three mechanisms can be implemented either in  
the phone in the local network or by the gatekeeper associated with the local  
network. In the mechanisms below, calls are transmissions of continuous  
streams of data in a packet switched network.

25 The first mechanism requires that telephones that have set up a call and  
are in voice (transmitting) will inspect the recent history of voice packets from  
the telephone to which they are connected. A packet loss rate of 10% is very  
hard for a subscriber to hear, so there is a considerable margin of detectable  
packet loss before the call will appear degraded to a subscriber. The decision  
30 of when to drop a call is based on the loss rate and the time for which the loss  
has been happening. In this case, because congestion is detectable earlier by  
a telephone than by its subscriber, it is possible to insert a recorded

announcement that the call would be dropped due to network congestion and allow a grace period of a few seconds before the call was cut off. This happens while the call is of acceptable quality. Since the main reason for such congestion will be calls at a higher priority, such a mechanism should be highly  
5 acceptable to the users. From a human-factors point of view, it is also likely that users with less important calls or calls that have only recently begun would chose to clear them down themselves if there was a perceivable call degradation. This mechanism is equivalent to TCP-backoff described above.

10 In this mechanism, when a decision is made to drop a call, this information is relayed to the gatekeeper for statistical measurement. This enables an estimate of whether a call will be successful to be provided to the telephone when it attempts to set up a call.

The second mechanism requires that telephones which are setting up a call will send a trial burst of 'ping' packets to the telephone which they are  
15 attempting to call before they send the signalling message which will cause the other telephone to ring. This 'bandwidth probe' might use four or five ping packets of the same size and priority as the voice packets that will be used when the call is in voice but more closely spaced in time. This puts a link briefly into overload by sending a short duration but high bandwidth pulse. The effect  
20 of these pings on established voice calls will be small, but if a link is close to congestion some of these packets will either suffer increasing delays or be lost altogether. By analysing the returned packets, the telephone can decide how close to congestion the path to the other telephone is and consequently the probability that the call will be of acceptable quality if it is set up. The optimal  
25 number and spacing of these pings can be chosen in accordance with the requirements of a particular network or system. A suitable algorithm for assigning a call success probability based on the arrival and time of the returned packets can also be determined. Based on this estimated probability the telephone will then make a random decision as to whether to continue with  
30 the call or to clear it down. If it is decided to clear the call down, the subscriber can be presented with a message to the effect that the network path to that destination was congested and that they should try again later. This call

admission mechanism is more cautious than the first mechanism so that existing calls continue in the face of slight congestion but new calls are not admitted. This mechanism is equivalent to TCP-slow start described above.

5 In this mechanism, the decision to either clear a call down or continue with the call is based on an acceptable packet loss rate for the particular transmission of continuous stream of data. It is possible to change the priority of the call to a higher priority if the packet loss rate is not acceptable. This change in priority tends to increase the success rate of the call being established.

10 The decision may be made by the telephone initiating the call, by another telephone or element in the same local network as initiating telephone, or by a human operator.

The third mechanism requires that a gatekeeper that is asked to set up a call will decide whether to allow even the initial trial burst to be used. On very heavily congested links where the offered call load is very much higher than the current capacity, the sum of the small transient loads from the initial bursts of many call attempts will be high enough to cause current calls in voice to be adversely affected and even dropped. However, by using statistics about the success or failure (and current loss rates) of calls to telephones controlled by other gatekeepers, the gatekeeper for a calling telephone can construct an estimate of loss probability for this new call. Based on this loss probability, the gatekeeper can make a random decision whether to permit even the initial trial burst of a call, or whether to stop it immediately. This mechanism has no equivalent in TCP but is very similar to 'call-gapping' used in public telephone networks. 'Call-gapping' operates to reduce the congestion by dropping call attempts very close to a calling subscriber when focussed overloads are detected. A focussed overload occurs when many people attempt to call a particular telephone number at the same time. When a call attempt is dropped, the caller is presented with an engaged tone.

30 It will be appreciated that, although each of the three mechanisms have been described as operating independently, it is possible to have all three

- 10 -

operating on the same call. For example, the first mechanism indicates that a call can be continued based on recent call history of the telephone being called, the third mechanism determines if the trial burst of ping packets can be transmitted, and the second mechanism determines the packet loss rate for the  
5 path chosen by the connecting network between the local networks containing the calling telephone and the telephone being called.

By using the first two mechanisms, voice calls in a network of a few thousand subscribers should be handled appropriately under almost all congestion conditions. The reasons for call clear down will be apparent to the  
10 users so there should be little user frustration or spurious re-calling.

When the third mechanism is also used, the congestion handling should be extremely robust and even focussed overloads on low bandwidth congested links should be resisted well.



- 11 -

## CLAIMS:

1. A method of call admission control for a continuous stream of data in packet switched networks including at least two local area networks communicating to one another across a connecting network, the method comprising the steps of:
  - a) transmitting a burst of trial data from a first node in a first local area network through the connecting network to a second node in a second local area network;
  - b) reflecting the burst of trial data received at the second node back to the first node;
  - c) receiving the reflected burst of trial data at the first node through the connecting network; and
  - d) comparing the reflected burst of trial data to the transmitted burst of trial data to determine whether transmission of a continuous stream of data can be initiated from the first node in the first local area network to the second node in the second local area network.
2. A method according to claim 1, wherein step a) includes selecting a path through the connecting network, the path being determined by the connecting network.
3. A method according to claim 1 or 2, wherein the burst of trial data is the same size as the packets to be transmitted in the continuous stream of data.
4. A method according to claim 3, wherein the burst of trial data is transmitted at the same data rate as the packets to be transmitted.
5. A method according to claim 3, wherein the burst of trial data is transmitted at a higher data rate than the packets to be transmitted.

- 12 -

6. A method according to any one of the preceding claims, wherein step d) includes comparing the number of packets in the transmitted burst of trial data and the reflected burst of trial data, and calculating an estimate of packet loss rate of the path.
- 5 7. A method according to claim 6, wherein multiple bursts of trial data are transmitted to improve the estimate.
8. A method according to any one of the preceding claims, further comprising:-
  - 10 e) deciding to transmit packet data based on an acceptable packet loss rate for the transmission of the continuous stream of data.
9. A method according to claim 8, wherein the packet loss rate is not acceptable and changing the priority of the transmission of continuous stream of data and repeating steps a) to d) above at the changed priority.
- 10 15 10. A method according to claim 8, wherein the packet loss rate is not acceptable and step e) includes not initiating the transmission of the continuous stream of data.



- 13 -

## ABSTRACT

## IMPROVEMENTS IN OR RELATING TO CALL CONTROL

Described herein is a method of controlling call admission for packet switched networks, each network including at least two local area networks (50, 60) and a connecting network (70). The method comprises transmitting a burst of trial data of the same size as the packet to be transmitted from a first node (52, 54) in a first local area network (50) to a second node (62, 64) in a second local area network (60) via the connecting network (70). The connecting network (70) comprises a plurality of routing nodes (72, 74, 76, 78, 80) for routing the burst of trial data to the second node in the second local area network along a particular path. The burst of trial data is reflected by the second node in the second local area network (60) back through the connecting network (70) to the first node in the first local area network (50). A comparison is carried out between the transmitted burst of trial data and the reflected burst of trial data to determine an estimate of packet loss rate of the path, and if the packet loss rate is acceptable a transmission of a continuous stream of data is initiated.

20 (Fig. 3)

1/3

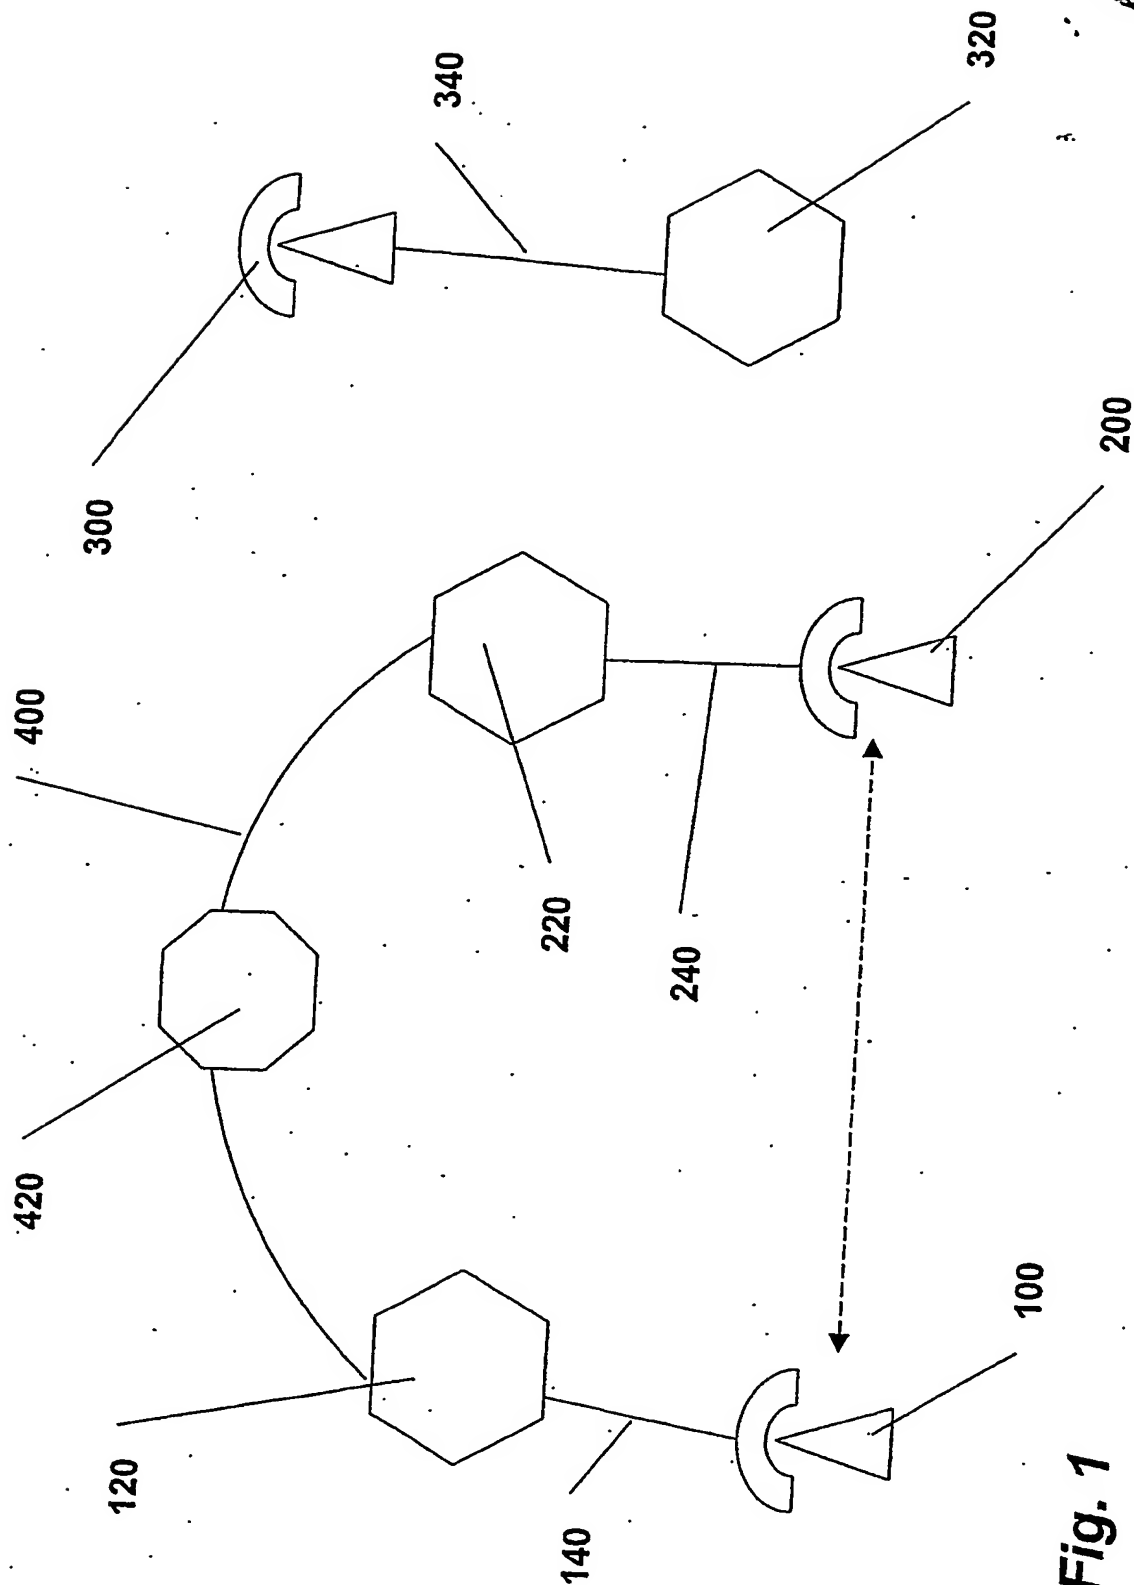
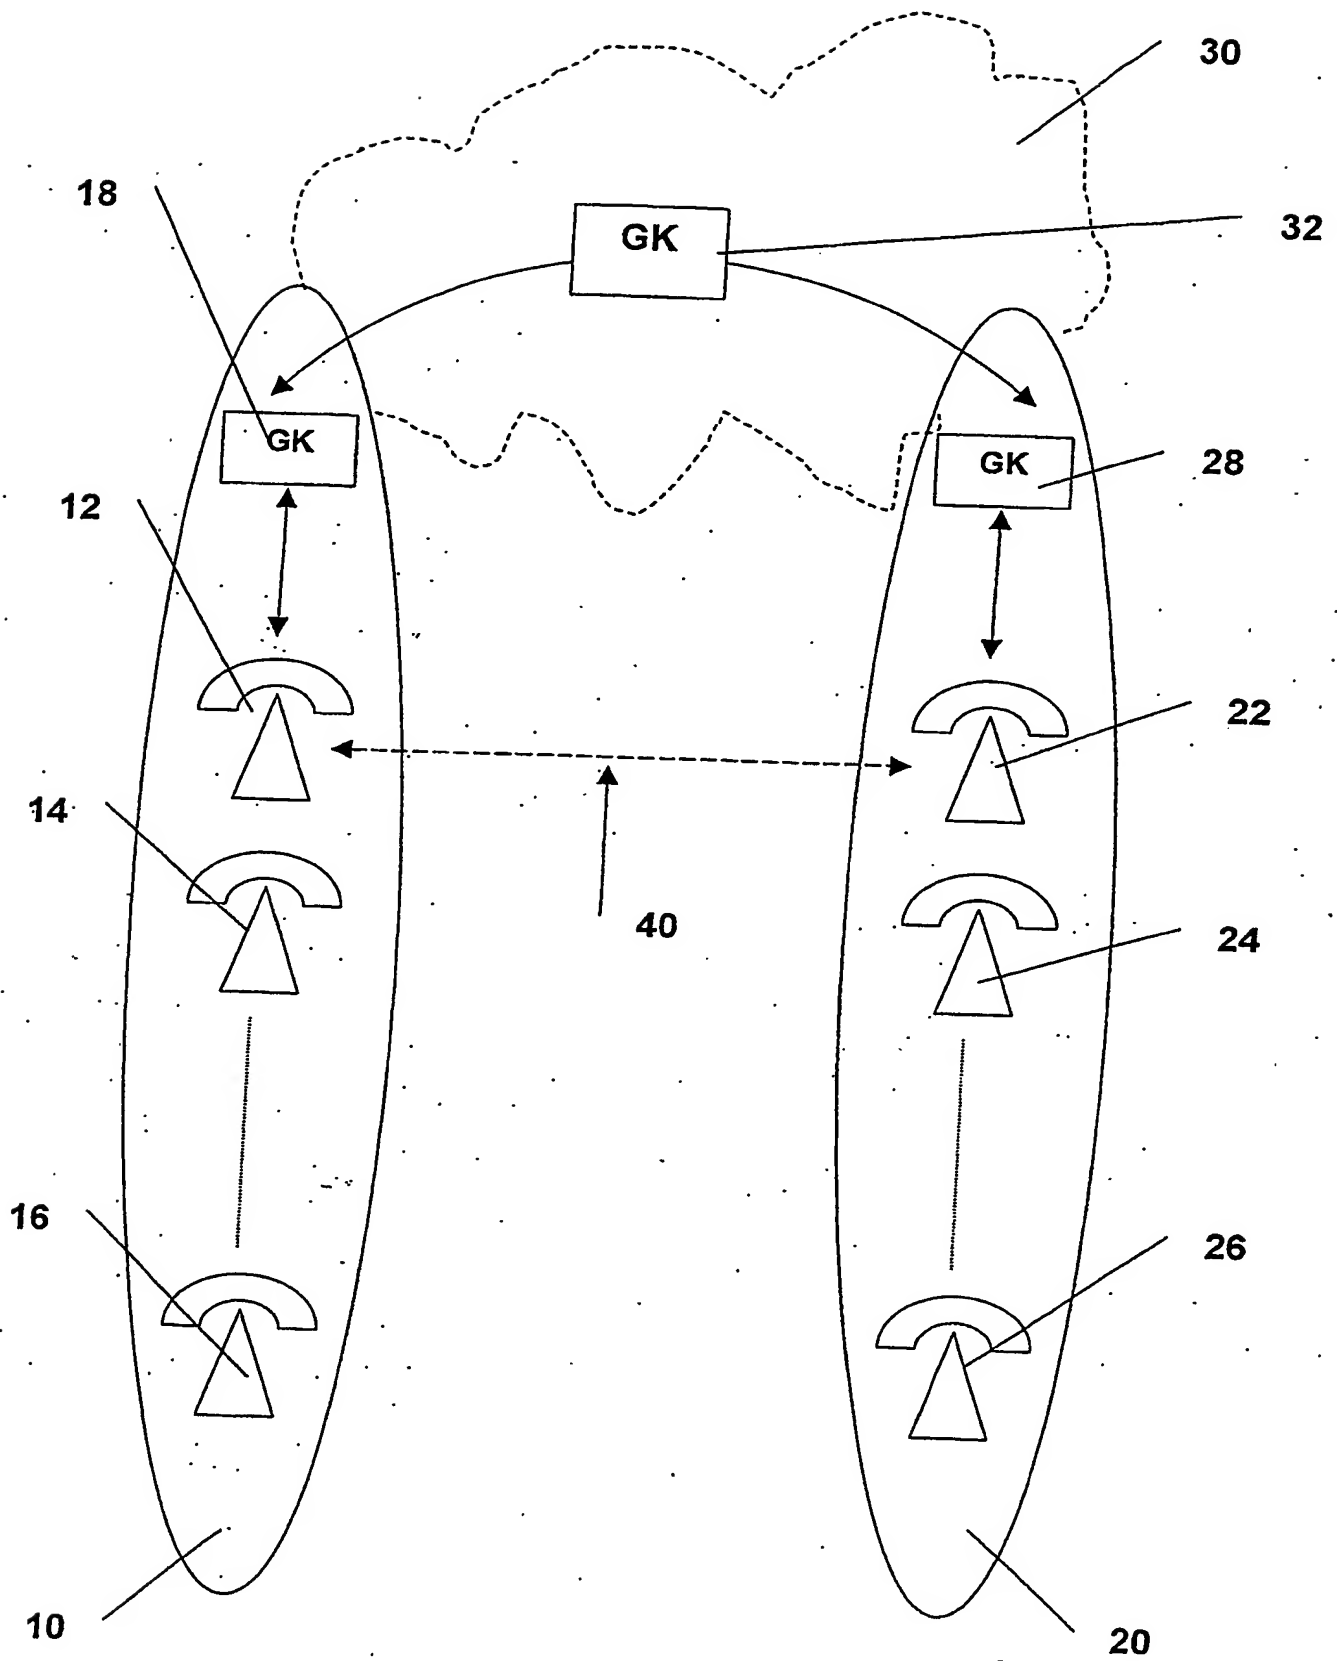


Fig. 1

**Fig. 2**

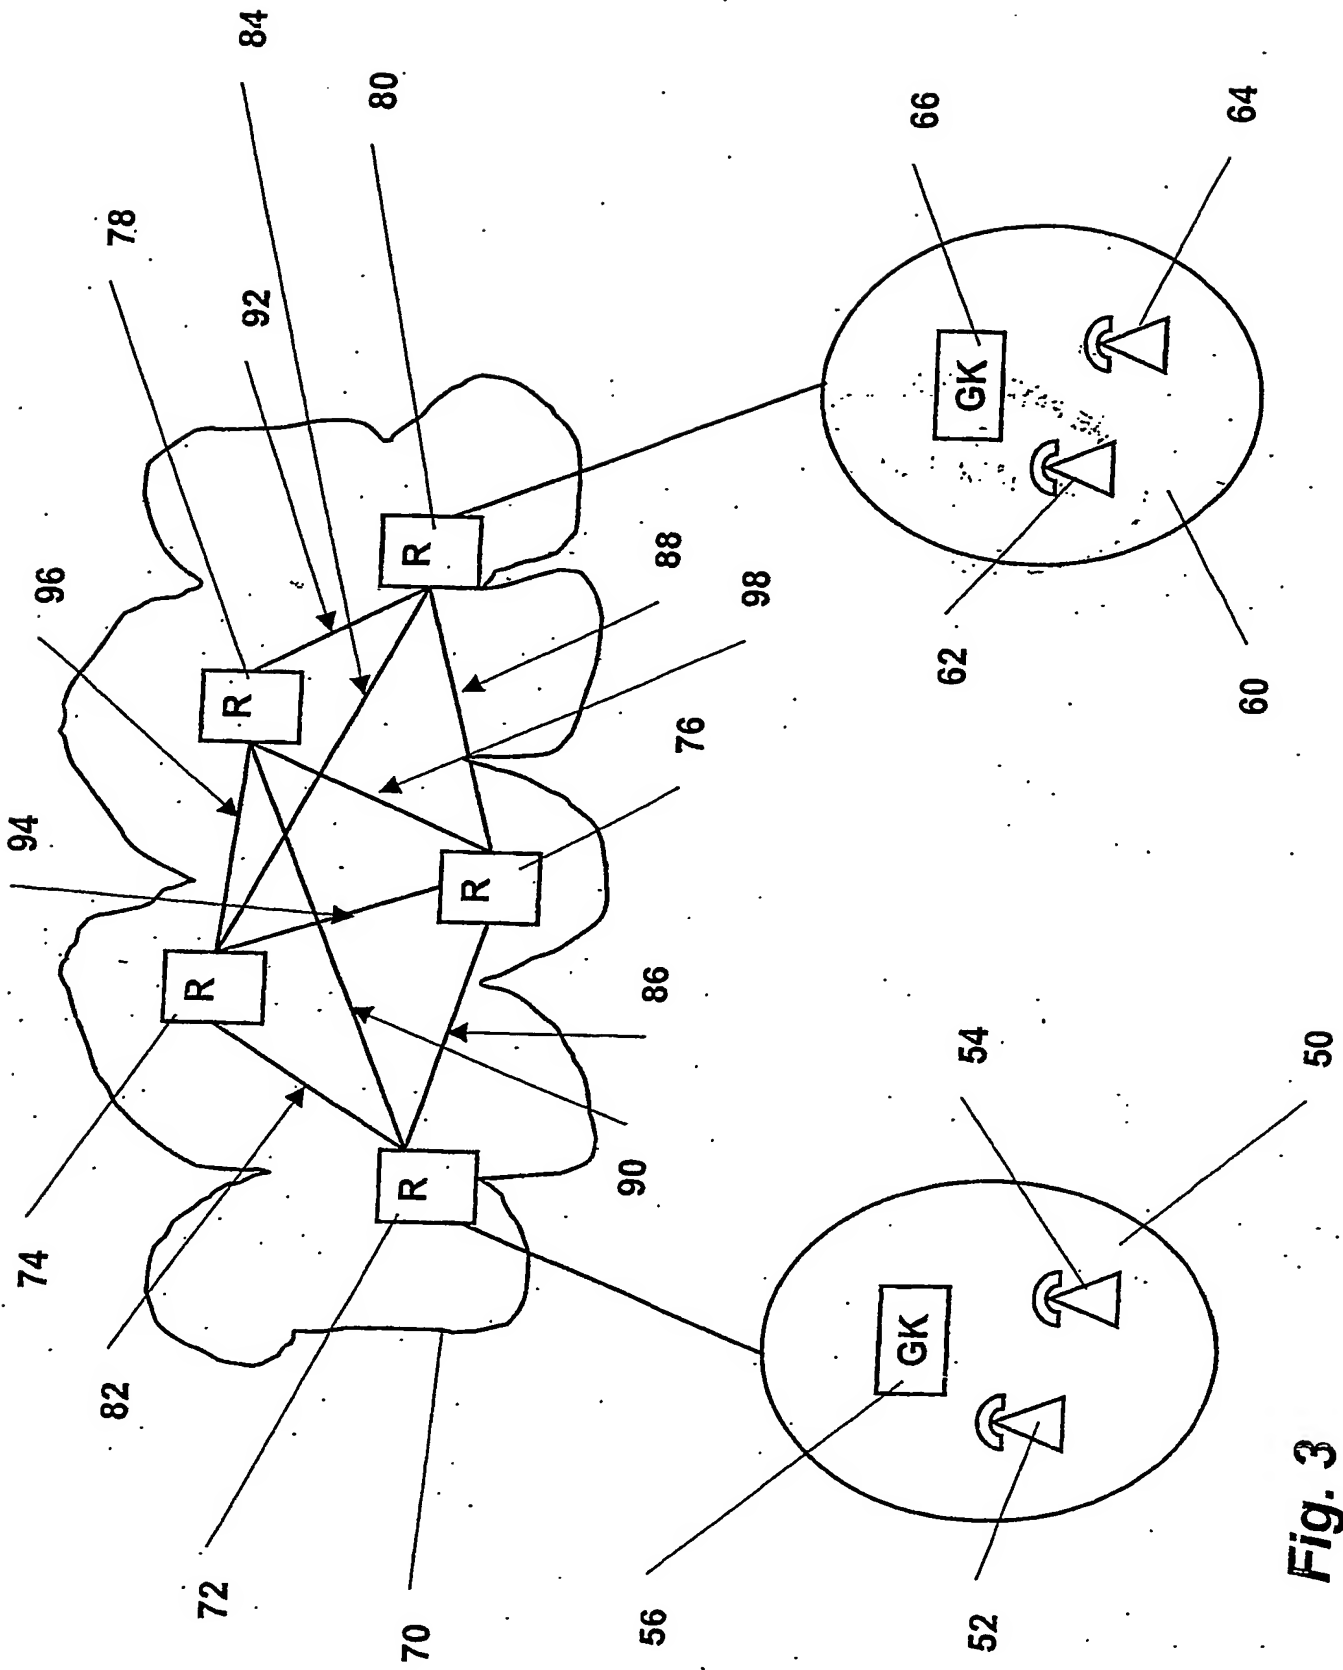


Fig. 3

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/050022

International filing date: 25 February 2005 (25.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: EP  
Number: 04251182.4  
Filing date: 01 March 2004 (01.03.2004)

Date of receipt at the International Bureau: 18 May 2005 (18.05.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

This Page is inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

## BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images problems checked, please do not report the problems to the IFW Image Problem Mailbox**